


## MALE END VIEW




1 = BROWN  
2 = WHITE  
3 = BLUE  
4 = BLACK



## SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	125 VAC/VDC
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x26 AWG
DRAIN/SHIELD	28 AWG/ALUM.-POLYESTER FOIL, T-C BRAID
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67

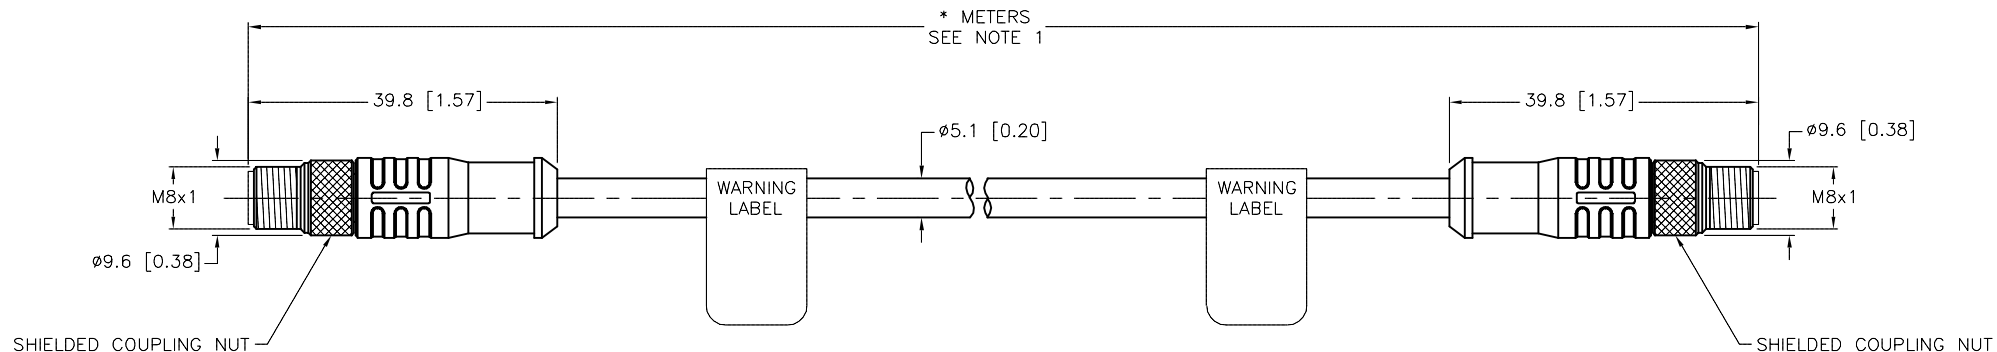

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	


**WARNING:**

**ELECTRICAL SHOCK HAZARD**  
CONNECTOR IS TO BE IN THE THE  
MATED STATE WHILE ENERGIZED  
REMOVE POWER BEFORE SERVICING.

SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>			
1.							
2.							
3.							
4.							
MATERIAL		DRFT RDS		DATE 10/10/14		DESCRIPTION PSGS 4M-*--PSGS 4M	
SEE SPECIFICATIONS		APVD L.H.		SCALE 1=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [ INCH ]		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS						B	
				DO NOT SCALE THIS DRAWING		FILE: 777034095	

B	ADD WARNING LABELS	NF	02/02/18	63893
REV	DESCRIPTION	BY	DATE	ECO NO.